




二片式聯結器

外觀尺寸圖

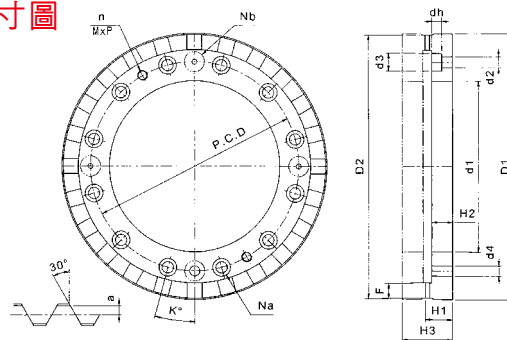

號碼 NO.	型號 Model NO.	外	外	內	齒 數 N	齒 形 F	齒 頂 厚 H1	齒 底 厚 H2	齒 全 厚 H3	固定螺栓孔 Fixed bolt hole				定位梢孔 Positioning pin hole				退出螺栓孔 Withdraw bolt hole				節 距 a	從 主 齒 頂 端 起 的 允 許 的 頂 端 間 隙 ±A
		徑 D1	徑 D2	徑 d1						Number of teeth	齒 輪 輪 廓 齒 輪 輪 廓	齒 輪 輪 廓 齒 輪 輪 廓	齒 輪 輪 廓 齒 輪 輪 廓	齒 輪 輪 廓 齒 輪 輪 廓	齒 輪 輪 廓 齒 輪 輪 廓	齒 輪 輪 廓 齒 輪 輪 廓	齒 輪 輪 廓 齒 輪 輪 廓	齒 輪 輪 廓 齒 輪 輪 廓	齒 輪 輪 廓 齒 輪 輪 廓	齒 輪 輪 廓 齒 輪 輪 廓	齒 輪 輪 廓 齒 輪 輪 廓		
1	24080-44XV	80	79	44	24	8	15.30	12.0	29	6	60	M8	11.0	8.8	4	55	30°	Ø2	6	60	M8x1.25	2	1.8
2	20100-40XV	100	98	40	20	9	18.37	14.0	34	6	60	6.6	11.0	6.0	3	60	30°	8	2	60	M8x1.25	1.37	1.22
3	24100-40XV	100	98	40	24	8	18.30	14.0	34	6	60	6.6	11.0	6.0	3	60	30°	8	2	60	M8x1.25	1.3	1.15
4	24120-60XV	120	118	60	24	8	18.30	14.0	34	6	80	6.6	11.0	6.0	4	80	30°	8	2	80	M8x1.25	1.3	1.15
5	30120-60XV	120	118	60	30	7	19.3	14.0	34	6	80	6.6	11.0	6.0	4	80	30°	8	2	80	M8x1.25	2.3	2
6	36140-80XV	140	138	80	36	11	18.52	14.0	34	6	100	6.6	11.0	6.0	3	100	30°	8	2	100	M8x1.25	2.5	2.2
7	24160-100XV	160	158	100	24	9	21.73	16.5	40	8	118	9.0	14.0	8.0	4	118	22.5°	10	2	118	M8x1.25	2.5	2.3
8	24180-120XV	180	178	120	24	9	21.61	16.5	40	8	140	9.0	14.0	8.0	3	140	22.5°	8	2	140	M8x1.25	1.61	1.44
9	36180-120XV	180	178	120	36	9	21.37	16.5	40	8	140	9.0	14.0	8.0	3	140	22.5°	8	2	140	M8x1.25	1.37	1.22
10	40180-120XV	180	178	120	40	9	21.76	16.5	40	8	140	9.0	14.0	8.0	3	140	22.5°	8	2	140	M8x1.25	1.76	1.57
11	24200-120XV	200	198	120	24	9	21.63	16.5	40	8	150	9.0	14.0	8.0	4	150	22.5°	8	2	150	M8x1.25	1.63	1.45
12	36200-120XV	200	198	120	36	11	21.52	16.5	40	8	150	9.0	14.0	8.0	3	150	22.5°	8	2	150	M8x1.25	1.52	1.36
13	72200-120XV	200	198	120	72	9	20.99	16.5	40	8	150	9.0	14.0	8.0	3	150	22.5°	8	2	150	M8x1.25	0.99	0.89
14	48210-135XV	210	208	135	48	13	21.71	16.5	40	12	165	9.0	14.0	8.0	3	158	15°	10	2	165	M8x1.25	1.71	1.53
15	60250-160XV	250	248	160	60	9	21.63	16.5	40	8	195	11.0	17.5	10.0	3	195	22.5°	10	2	195	M10x1.50	1.63	1.45
16	72250-160XV	250	248	160	72	11	21.42	16.5	40	8	195	11.0	17.5	10.0	3	195	22.5°	10	2	195	M10x1.50	1.42	1.27
17	360250-160XV	250	248	160	360	7	20.5	16.5	40	8	195	11.0	17.5	10.0	3	195	22.5°	10	2	195	M10x1.5	0.5	0.4
18	72280-190XV	280	278	190	72	11	21.42	16.5	40	8	222	13.0	20.2	12.0	3	222	22.5°	10	2	222	M10x1.50	1.42	1.27
19	360280-190XV	280	278	190	360	8	20.6	16.5	40	8	222	13.0	20.2	12.0	4	222	22.5°	10	2	222	M10x1.5	0.6	0.5
20	60320-210XV	320	318	210	60	11	30.46	25.5	58	10	258	13.0	20.2	12.0	4	258	18°	12	4	258	M12x1.75	1.46	1.30
21	72320-210XV	320	318	210	72	11	30.74	25.5	58	12	258	13.0	20.2	12.0	3	258	15°	12	4	258	M12x1.75	1.74	1.55
22	360320-210XV	320	318	210	360	9	29.6	25.5	58	12	258	13.0	20.2	12.0	3	258	15°	12	4	258	M12x1.75	0.6	0.5
23	48400-280XV	400	398	280	48	13	31.52	26.0	60	12	335	13.0	20.2	12.0	3	335	15°	12	4	335	M12x1.75	1.52	1.36
24	60400-280XV	400	398	280	60	15	31.82	26.0	60	12	335	13.0	20.2	12.0	3	335	15°	12	4	335	M12x1.75	1.82	1.62
25	72400-280XV	400	398	280	72	13	31.52	26.0	60	12	335	13.0	20.2	12.0	3	335	15°	12	4	335	M12x1.75	1.52	1.36
26	360400-280XV	400	398	280	360	13	30.6	26.0	60	12	335	13.0	20.0	12.0	3	335	15°	12	4	335	M12x1.75	0.6	0.5
27	48520-415XV	520	518	415	48	15	31.97	26.0	60	12	450	13.0	20.2	12.0	3	450	15°	12	4	450	M12x1.75	1.97	1.76
28	72520-415XV	520	518	415	72	15	31.97	26.0	60	12	450	13.0	20.2	12.0	3	450	15°	12	4	450	M12x1.75	1.97	1.76
29	360520-415XV	520	518	415	360	15	30.8	26.0	60	12	450	13.0	20.2	12.0	3	450	15°	12	4	450	M12x1.75	0.8	0.7
30	60600-480XV	600	598	480	60	15	36.95	29.0	70	12	530	17.0	26.0	16.0	4	530	15°	12	4	530	M12x1.75	1.95	1.74
31	72600-480XV	600	598	480	72	19	37.28	29.0	70	12	530	17.0	26.0	16.0	3	530	15°	12	4	530	M12x1.75	2.28	2.04
32	360600-480XV	600	598	480	360	15	36	29.0	70	12	530	17.0	26.0	16.0	3	530	15°	12	4	530	M12x1.75	1	0.9
33	72700-560XV	700	698	560	72	19	36.70	29.0	70	12	610	17.0	26.0	16.0	3	610	15°	14	4	610	M12x1.75	1.70	1.50
34	360700-560XV	700	698	560	360	19	36	29.0	70	12	610	17.0	26.0	16.0	3	610	15°	14	4	610	M12x1.75	1	0.9
35	721000-830XV	1000	998	830	72	22	61.70	54.5	120	18	900	17.0	26.0	16.0	4	900	10°	-	4	900	M12x1.75	1.70	1.50
36	3601000-830XV	1000	998	830	360	22	61.5	54.5	120	18	900	17.0	26.0	16.0	4	900	10°	-	4	900	M12x1.75	1.75	1.4
37	721200-1000XV	1200	1198	1000	72	22	71.70	64.5	140	20	1080	21.0	32.0	20.0	4	1080	9°	-	4	1080	M16x2.00	1.70	1.50
38	3601200-1000XV	1200	1198	1000	360	22	71.6	64.5	140	20	1080	21.0	32.0	20.0	4	1080	9°	-	4	1080	M16x2.00	1.6	1.5